

# T2 SDD - SDP

Surface Range / Surface Deluxe




Surface mounted luminaire with excellent side spill of light. Available with perforated cover or frosted ribbed diffuser designed to complement our T6CDX and T3WDX range.

## Specification

- White powder coated metal body
- Perforated curved basket
- Frosted ribbed diffuser attachment
- Adjustable head
- Injection moulded polycarbonate end cap
- LED 4000°K

## Application

- Office
- Conference Room
- Call Centre
- Reception

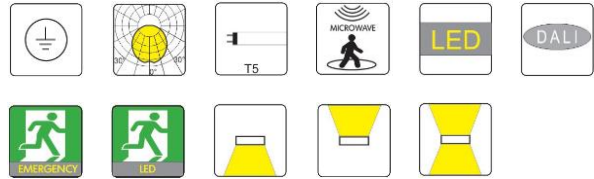

## Product Codes

|            |                  |         |    |
|------------|------------------|---------|----|
| T2SDD228FZ | Ribbed Diff      | 2 x 28W | T5 |
| T2SDD254FZ | Ribbed Diff      | 2 x 54W | T5 |
| T2SDP228FZ | Perforated Cover | 2 x 28W | T5 |
| T2SDP254FZ | Perforated Cover | 2 x 54W | T5 |

|            |             |                  |     |        |        |
|------------|-------------|------------------|-----|--------|--------|
| <b>LED</b> | T2SDD4400EZ | Ribbed Diff      | 30W | 1200mm | 4400Lm |
| <b>LED</b> | T2SDD6720EZ | Ribbed Diff      | 50W | 1200mm | 6720Lm |
| <b>LED</b> | T2SDD9040EZ | Ribbed Diff      | 75W | 1200mm | 9040Lm |
| <b>LED</b> | T2SDP4400EZ | Perforated Cover | 30W | 1200mm | 4400Lm |
| <b>LED</b> | T2SDP6720EZ | Perforated Cover | 50W | 1200mm | 6720Lm |
| <b>LED</b> | T2SDP9040EZ | Perforated Cover | 75W | 1200mm | 9040Lm |

**EM** Add suffix /EM for 3hr Maintained Emergency

**IMPROVEMENTS** Wattage consumption and performance is subject to improvements. Please check the current technical data at the time of purchase.

\*Wired Body No Attachments or End Cap


## Attachments

|        |                        |
|--------|------------------------|
| T2SDXD | Ribbed Diffuser Only   |
| T2SDXP | Perforated Basket Only |

## End Cap (Set)

|             |                    |
|-------------|--------------------|
| OEM-CDX-ECW | White End Cap Set  |
| OEM-CDX-ECS | Chrome End Cap Set |

## Dimensions

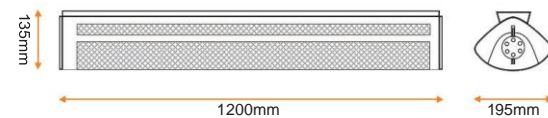

Up Lighter



Down Lighter