

GRI

Recessed LED Range / Recessed grid with **Opal Diffuser**

Recessed grid formation, Individual cell luminaire with opal high

Specification

transmission diffuser

- · Injection moulded cell
- Fabricated metal body
- LED 4000°K

Application

- Corridors
- · Reception

- · Circulation Area
- Medical Center























Product Codes

LED T6G	RI664600EZ	38W	4600Lm
LED T60	GRI3124600EZ	38W	4600Lm 📃
Add suffix /EM for 3hr Maintained Emergency			


Wattage consumption and performance is subject to improvements. Please check the current technical data at the time of purchase.

Optional Extras

OEM-ATT-01

Plasterboard Recessing Kit

Dimensions

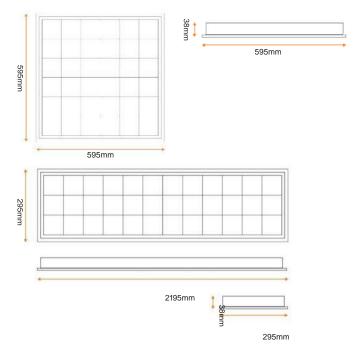

Fax: 01905 620776