

T6 PRE

Recessed LED Range / Predator



T6 PRE

Recessed LED Range / Predator




This provides a highly sophisticated design in conjunction with today's increasing demand for energy saving luminaires direct and indirect LED lighting.

Specification

- Injection moulded polycarbonate end cap
- U.V. stabilised to prevent discolouring
- Extruded aluminium heatsink
- LED 4000°K

Application

- Schools / Colleges etc
- Offices
- Reception
- Conference Room

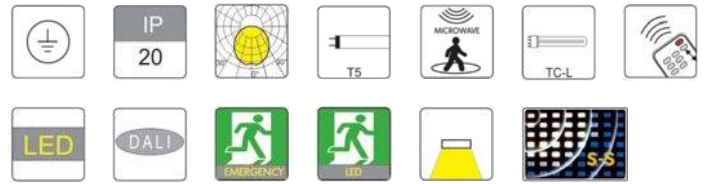

Product Codes

LED	T6PRE3360EZ	25W	3360Lm
LED	T6PRE4520EZ	38W	4520Lm
EM	Add suffix /EM for 3hr Maintained Emergency		
IMPROVEMENTS	Wattage consumption and performance is subject to improvements. Please check the current technical data at the time of purchase.		

Optional Extras

OEM-ATT-01
T6CDXSB

Plasterboard Recessing Kit
Surface Conversion Box

Dimensions

