

BATTEN - PRO



50,000
Hours




5
Years
Warranty




ECA

The Batten - Pro is a high-performance batten for multipurpose applications, featuring a polycarbonate diffuser, ABS end caps and a quick access gear tray for fast termination. The range is available with batten-mounted DALI, Microwave Sensor, PIR Sensors and integral emergency options.

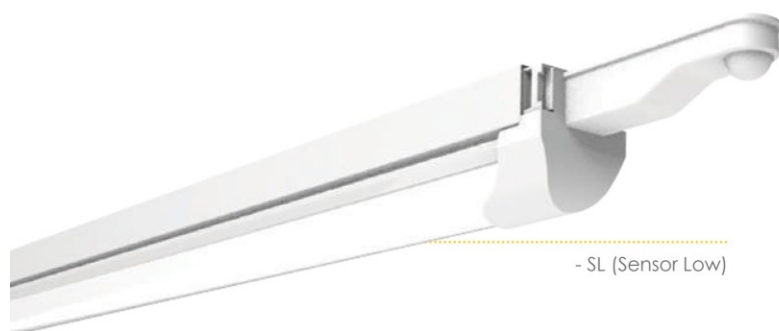

- SL (Sensor Low)

powered by
TRIDONIC

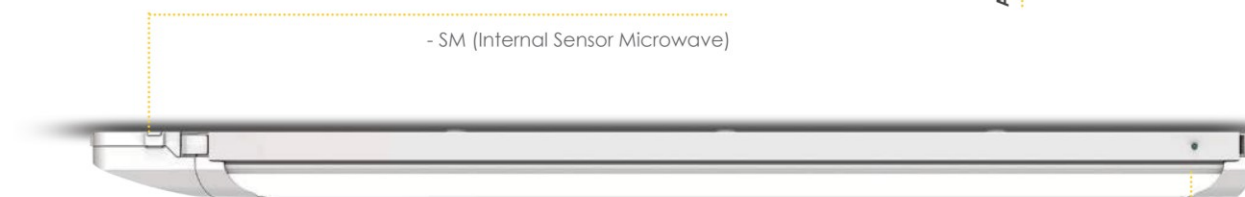

- SM (Internal Sensor Microwave)

- EM (Emergency) 3W Integral Emergency
3 hours maintained duration

Physical Data	IP Rating	IP20
	Weight (kg)	
	8W	1.2
	16W/32W	2.0
	25W/49W	2.5
	47W/69W	3.0
	Dimensions (mm)	
	8W	600 x 60 x 70
	16W/32W	1200 x 60 x 70
	25W/49W	1500 x 60 x 70
47W/69W	1800 x 60 x 70	
BESA FIXING CENTRES (mm)		
(All versions)	305	

- Benefits**
- Multipurpose batten for a variety of applications
 - Quick access gear tray for fast termination
 - Batten-mounted DALI, Sensor and Emergency options

- Applications**
- Corridors
 - Racking
 - Industrial

PART NO.	WATTAGE	DESCRIPTION	BEAM	EFFICACY	LUMENS	Ra/CCT	SYSTEM POWER
BTN001	8W	8W LED Batten, 2ft, 840	120° x 150°	122	1,100	840	9W
BTN005	16W	16W LED Batten, 4ft, 840	120° x 150°	133	2,400	840	18W
BTN006	32W	32W LED Batten, 4ft, 840	120° x 150°	133	4,800	840	36W
BTN007	25W	25W LED Batten, 5ft, 840	120° x 150°	120	3,600	840	30W
BTN008	49W	49W LED Batten, 5ft, 840	120° x 150°	129	7,100	840	55W
BTN009	47W	47W LED Batten, 6ft, 840	120° x 150°	124	6,600	840	53W
BTN010	69W	69W LED Batten, 6ft, 840	120° x 150°	120	9,400	840	78W

- + Controls**
- CD DALI Dimmable
 - CD not for use with BTN001.

- + Sensor**
- SL Sensor Low Level (up to 8m detection height)
 - SM Sensor Microwave
 - SB Switching Sensor

- + Emergency**
- EM Emergency
 - EMST Emergency Self-Test
 - EM not for use with BTN001.

- Accessories**
- ACS153 Programming Remote for SB Sensor
 - ACS067 Programming Remote for SH / SL Sensor versions
 - ACS030 Commissioning Handset for SH / SL Sensor versions