



Product data sheet

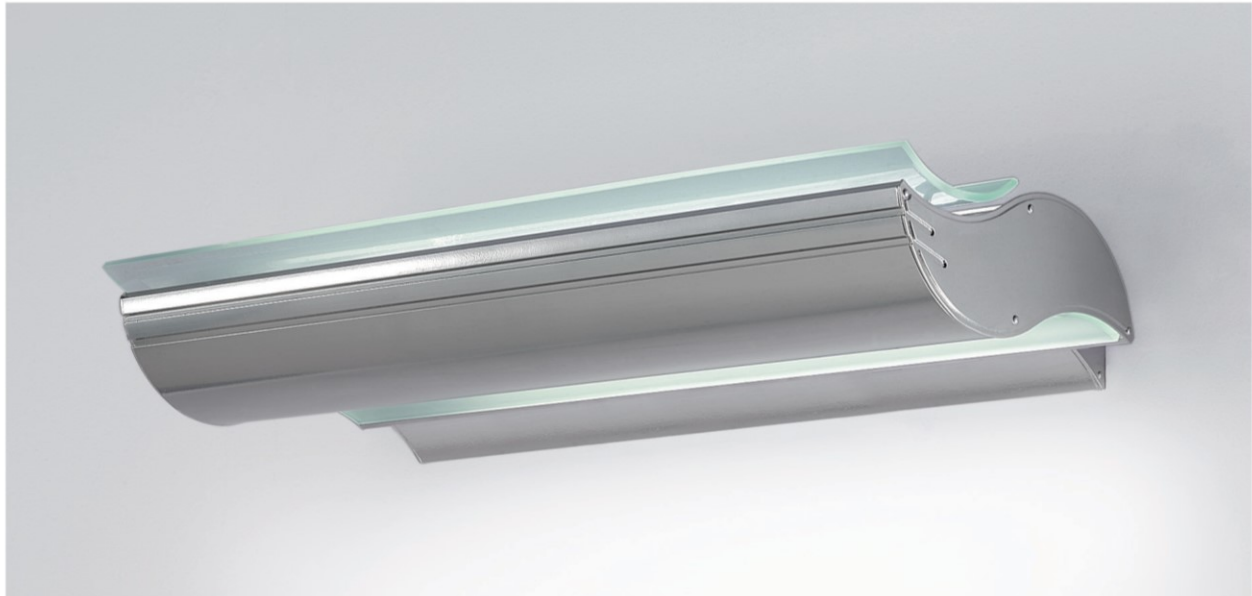

3 Warm White LED (3000K)	CRI 80 39W
Lumen Output	6030 lm
LOR	0.66
CRI	80
Total Power	42.6W
Power Factor	0.99
Running Current	0.19A
Inrush Current	32.0A (251us)
Efficacy	73 lm/W
Emergency Output (BLF)	422 (7%)

4 Neutral White LED (4000K)	CRI 80 39W
Lumen Output	6312 lm
LOR	0.66
CRI	80
Total Power	42.6W
Power Factor	0.99
Running Current	0.19A
Inrush Current	32.0A (251us)
Efficacy	97 lm/W
Emergency Output (BLF)	441 (7%)

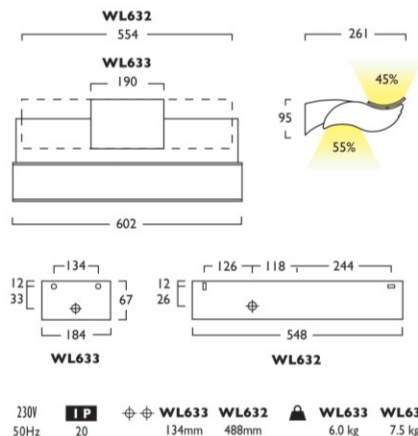

Breeze 632, 633

LED	39W LED	WL632	LED	39	+	417
	39W LED	WL633	LED	39	+	417

Gear types F & G must be operated through a DSI

- A Integral Driver
- E Emergency (WL632)
- F Digital Dim
- G Digital Dim + Emergency (WL632)
- J Switch Dim
- K K Switch Dim + Emergency (WL632)
- S DALI Dim
- T DALI Dim + Emergency (WL632)
- C DALI Dim + DALI Emergency (WL632)

3 Warm (3000K) 4 Neutral (4000K)

I White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

- Sculpted wave of architectural lighting with curved glass features
- Available in a choice of lumen outputs, delivering up to 6312 lumens
- Efficacies up to 97 lm/W
- High performance Zhaga Book 7 LED, colour stability within 3 MacAdams
- Meticulously designed and engineered, life expectancy of 60,000 hours (L70 B10)
- Provides a perfect balance of uplighting and downlighting