



**Product data sheet**

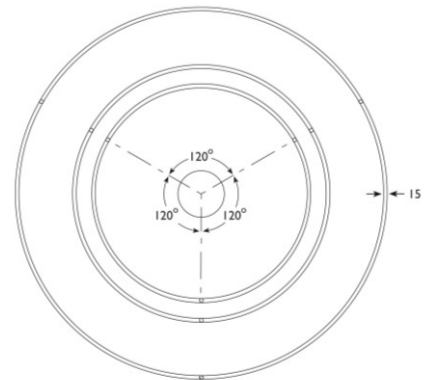

3 Warm White LED (3000K)	CRI 80	48W	55W	72W
Lumen Output		6270 lm	7220 lm	9500 lm
LOR		0.72	0.72	0.72
CRI		80	80	80
Total Power		54.2W	62.4W	81.4W
Power Factor		0.90	0.90	0.90
Running Current		0.26A	0.30A	0.39A
Inrush Current		23.0A	23.0A	43.0A
Efficacy		83 lm/W	83 lm/W	84 lm/W
Emergency Output (BLF)		N/A	N/A	N/A

4 Neutral White LED (4000K)	CRI 80	48W	55W	72W
Lumen Output		6600 lm	7600 lm	10000 lm
LOR		0.72	0.72	0.72
CRI		80	80	80
Total Power		54.2W	62.4W	81.4W
Power Factor		0.90	0.90	0.90
Running Current		0.26A	0.30A	0.39A
Inrush Current		23.0A	23.0A	43.0A
Efficacy		87 lm/W	87 lm/W	88 lm/W
Emergency Output (BLF)		N/A	N/A	N/A

71 x 416  
48

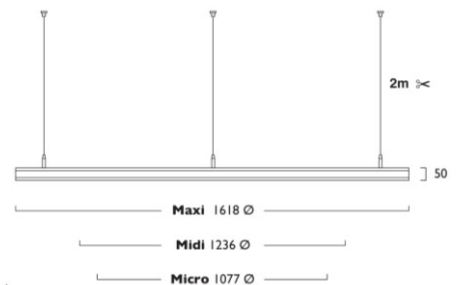

**Explora® Halo** Pendant

LED CRI 80

48W	LED	Micro	PN1103	LED	48	+	481
55W	LED	Midi	PN1104	LED	55	+	482
72W	LED	Maxi	PN1105	LED	72	+	483

- Elegant LED circular pendant with Chrome finish
- Available in Maxi, Midi and Micro sizes
- Choice of lumen outputs, delivering up to 10,000 lumens
- Efficacies of up to 88 lm/W, CRI 80
- Life expectancy of 35,000 hours (L70 B50)
- Single colour, with RGB available on request (Micro and Midi only)
- Colour options apply to Driver Housing

- A** Integral Driver
- J** Switch Dim
- S** DALI Dim

- 3** Warm (3000K)    **4** Neutral (4000K)

- 1** White (RAL 9010)    **2** Urban Graphite (RAL 7046)    **3** Black (RAL 9005)    *Colour options apply to Driver Housing*

- 264** 3x 5m Suspensions (wires only)