







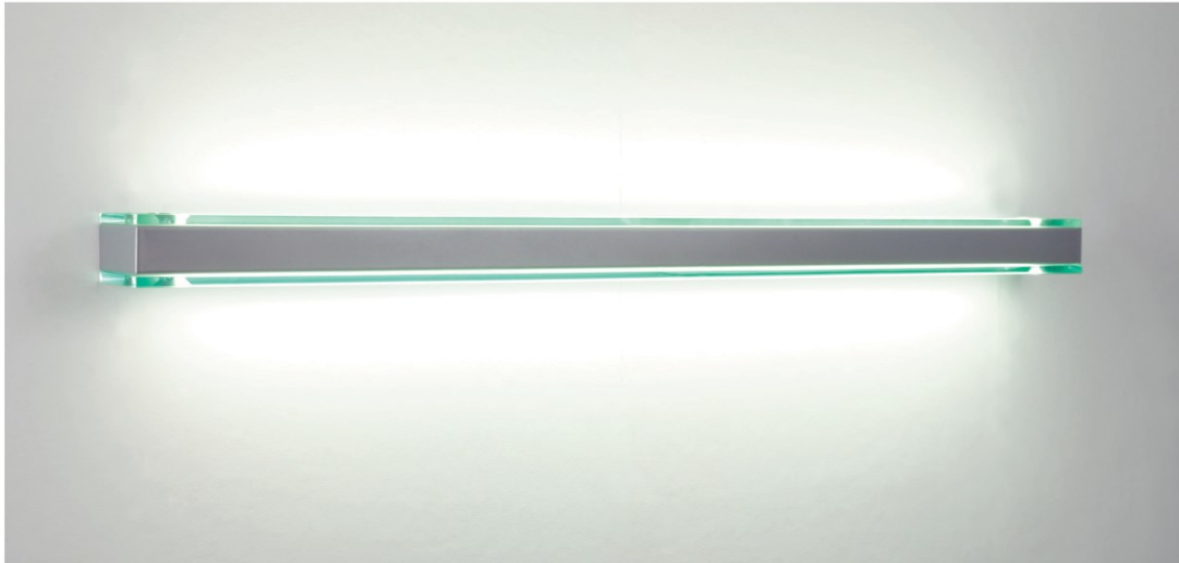


Product data sheet

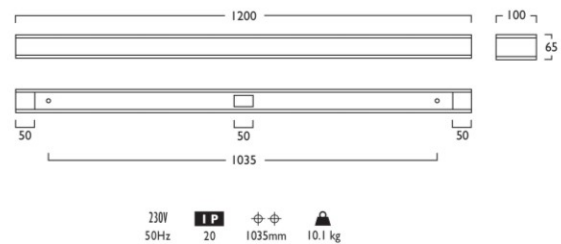

	CRI 80	17W	31W
3 Warm White LED (3000K)			
Lumen Output		2560 lm	5120 lm
LOR		0.73	0.73
CRI		80	80
Total Power		18.6W	35.5W
Power Factor		0.90	0.95
Running Current		0.09A	0.16A
Inrush Current		8.0A (100us)	23.3A (168us)
Efficacy		100 lm/W	105 lm/W
Emergency Output (BLF)		409 (16%)	409 (8%)
4 Neutral White LED (4000K)			
Lumen Output		2672 lm	5346 lm
LOR		0.73	0.73
CRI		80	80
Total Power		18.6W	35.5W
Power Factor		0.90	0.95
Running Current		0.09A	0.16A
Inrush Current		8.0A (100us)	23.3A (168us)
Efficacy		104 lm/W	109 lm/W
Emergency Output (BLF)		427 (16%)	427 (8%)



Linaj 98l

LED       

17W	LED	1200mm	WL98l	LED	17	+	433
31W	LED	1200mm	WL98l	LED	31	+	433

Gear types F & G must be operated through a DSI

- A** Integral Driver
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** K Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency

3 Warm (3000K) **4** Neutral (4000K)

1 White (RAL 9010) **2** Urban Graphite (RAL 7046) **3** Black (RAL 9005)

Luminescent Trim *Shown*

- Sleek stunning minimalistic design
- Available in a choice of lumen outputs, delivering up to 5346 lumen:
- Efficacies up to 109 lm/W
- High quality 10mm Etched glass to upper and lower fascia
- 55,000 hour life expectancy (L80 B10)
- Horizontal and vertical mounting, Linaj Link format available
- Striking optional Luminescent Trims offer colour customisation