



# Bright Future LED Product data sheet

## T2ASP5500EZ

Surface Range/Aspect

### Product Codes

<b>LED</b>	T2ASP5500EZ	5ft Prismatic/Opal Diffuser	1500mm	38W	5500lm
------------	-------------	-----------------------------	--------	-----	--------

### Emergency


<b>EM</b>	T2ASP5500EZ/EM	5ft Prismatic/Opal Diffuser	1500mm	38W	5500lm
-----------	----------------	-----------------------------	--------	-----	--------

### DALI

<b>WALL</b>	T2ASP5500XD	5ft Prismatic/Opal Diffuser	1500mm	38W	5500lm
-------------	-------------	-----------------------------	--------	-----	--------



### Dimensions

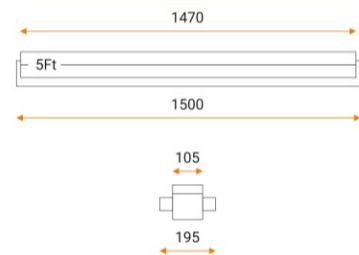

### Material and Finish

- Extruded polycarbonate
- Fabricated steel body
- Polycarbonate end caps
- U.V. stabilised to prevent discolouring
- Powder coated finish

### LED Characteristics

CCT	4000°K
Ra (CRI)	>80
Life expectancy	50,000 hrs L80 B10
Board lumens	5500lm
Rated power	38W

### Electrical Input

Rated input voltage	~230-240V AC
Rated input frequency	50-60Hz
Power factor	>0.9
Running current	0.19A
Total wattage	40W

### Weight

