



Bright Future LED Product data sheet

T2LIA4400EZ

Surface Range/Upward&Downward Linear Type A

Product Codes

LED	T2LIA4400EZ	1165x83x90mm	30W/23W	Down 4400lm - Up 3300lm
------------	-------------	--------------	---------	-------------------------

Emergency


EM	T2LIA4400EZ/EM	1165x83x90mm	30W/23W	Down 4400lm - Up 3300lm
-----------	----------------	--------------	---------	-------------------------

DALI

DALI	T2LIA4400XD	1165x83x90mm	30W/23W	Down 4400lm - Up 3300lm
-------------	-------------	--------------	---------	-------------------------



Dimensions

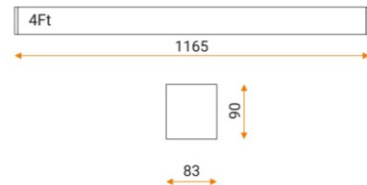

Material and Finish

- Extruded aluminium housing
- U.V. stabilised to prevent discolouring
- PMMA diffuser

LED Characteristics

CCT	4000°K
Ra (CRI)	>80
Life expectancy	50,000 hrs L80 B10
Board lumens	Down 4400lm - Up 3300lm
Rated power	Down 30W - Up 23W

Weight



Electrical Input

Rated input voltage	~230-240V AC
Rated input frequency	50-60Hz
Power factor	>0.9
Running current	0.30A
Total wattage	56W

Photometric Data

Calculation file	T2LIA4400EZ.ltd
LOR	99.98%
Luminaire lumens	6615lm
Efficacy LL/CW	117.5

