



Bright Future LED Product data sheet

T2LIA5500EZ

Surface Range/Upward&Downward Linear Type A

Product Codes

LED	T2LIA5500EZ	1445x83x90mm	38W/30W	Down 5500lm - Up 4400lm
-----	-------------	--------------	---------	-------------------------

Emergency

EM	T2LIA5500EZ/EM	1445x83x90mm	38W/30W	Down 5500lm - Up 4400lm
----	----------------	--------------	---------	-------------------------

DALI

DALI	T2LIA5500XD	1445x83x90mm	38W/30W	Down 5500lm - Up 4400lm
------	-------------	--------------	---------	-------------------------



Material and Finish

- Extruded aluminium housing
- U.V. stabilised to prevent discolouring
- PMMA diffuser

LED Characteristics

CCT	4000°K
Ra (CRI)	>80
Life expectancy	50,000 hrs L80 B10
Board lumens	Down 5500lm - Up 4400lm
Rated power	Down 38W - Up 30W

Electrical Input


Rated input voltage	~230-240V AC
Rated input frequency	50-60Hz
Power factor	>0.9
Running current	0.26A
Total wattage	73W

Photometric Data

Calculation file	T2LIA5500EZ.ltd
LOR	99.98%
Luminaire lumens	8135lm
Efficacy LL/CW	111.43



Dimensions

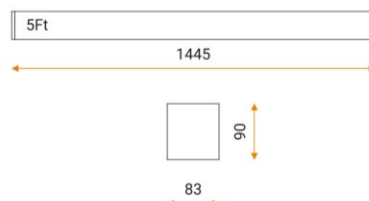

Weight

