



# Bright Future LED Product data sheet

## T3LIAW6720EZ

Compact Decorative Range/Linear Wall Up/Down lighter

### Product Codes

**LED** T3LIAW6720EZ 605x83x90mm 25W/25W Down 3360lm - Up 3360lm

### Emergency

**EM** T3LIAW6720EZ/EM 605x83x90mm 25W/25W Down 3360lm - Up 3360lm

### DALI

**DALI** T3LIAW6720XD 605x83x90mm 25W/25W Down 3360lm - Up 3360lm



### Material and Finish

- Extruded aluminium housing
- U.V. stabilised to prevent discolouring
- PMMA diffuser

### LED Characteristics

CCT	4000°K
Ra (CRI)	>80
Life expectancy	50,000 hrs L80 B10
Board lumens	Down 3360lm - Up 33600lm
Rated power	Down 25W - Up 25W

### Electrical Input


Rated input voltage	~230-240V AC
Rated input frequency	50-60Hz
Power factor	>0.9
Running current	0.24A
Total wattage	53W

### Photometric Data

Calculation file	T3LIAW6720EZ.Idt
LOR	99.98%
Luminaire lumens	5950lm
Efficacy LL/CW	112.26



### Dimensions

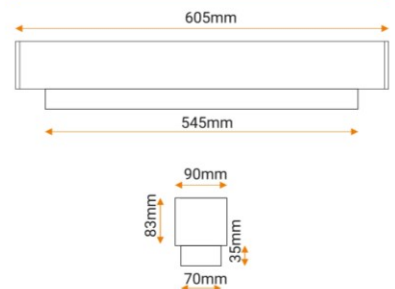

### Weight



3.0 kg

