



Bright Future LED Product data sheet

T3SPA3150EZ

Compact Decorative Range/Spaceline

| Product Codes | | | | |
|---------------|-------------|-----|--------|--------|
| LED | T3SPA3150EZ | 22W | ø432mm | 3150lm |

| Emergency | | | | |
|-----------|----------------|-----|--------|--------|
| EM | T3SPA3150EZ/EM | 22W | ø432mm | 3150lm |

| DALI | | | | |
|------|-------------|-----|--------|--------|
| DALI | T3SPA3150XD | 22W | ø432mm | 3150lm |




* with IP65 seal kit

| Material and Finish | |
|---|---|
| • Injection moulded polycarbonate base | • U.V. stabilised to prevent discolouring |
| • Injection moulded polycarbonate opal diffuser | |


| LED Characteristics | |
|---------------------|--------------------|
| CCT | 4000°K |
| Ra (CRI) | >80 |
| Life expectancy | 50,000 hrs L80 B10 |
| Board lumens | 3150lm |
| Rated power | 22W |

| Electrical Input | |
|-----------------------|--------------|
| Rated input voltage | ~230-240V AC |
| Rated input frequency | 50-60Hz |
| Power factor | >0.9 |
| Running current | 0.11A |
| Total wattage | 25W |

| Photometric Data | |
|------------------|-----------------|
| Calculation file | T3SPA3150EZ.ltd |
| LOR | 99.98% |
| Luminaire lumens | 2102.9lm |
| Efficacy LL/CW | 84 |



Dimensions

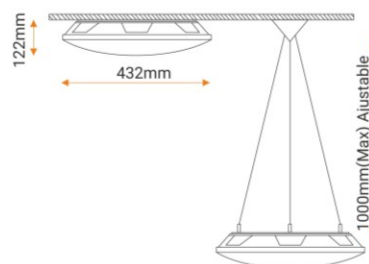

Cut out



Weight

