



Bright Future LED Product data sheet

T6IDD

Recessed LED Range / Indirect with Prismatic Diffuser

Product Codes

LED	T6IDD4520EZ	595x595x110mm	38W	4520lm
------------	-------------	---------------	-----	--------

Emergency


EM	T6IDD4520EZ/EM	595x595x110mm	38W	4520lm
-----------	----------------	---------------	-----	--------

DALI

DALI	T6IDD4520XD	595x595x110mm	38W	4520lm
-------------	-------------	---------------	-----	--------



Dimensions

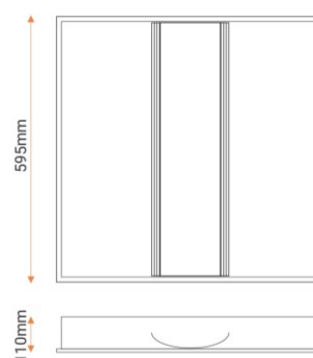

Material and Finish

- Fabricated steel body
- Powder coated finish
- Opal and prismatic diffuser

LED Characteristics


CCT	4000°K
Ra (CRI)	>80
Life expectancy	50,000 hrs L80 B10
Board lumens	4520lm
Rated power	38W

Electrical Input

Rated input voltage	~230-240V AC
Rated input frequency	50-60Hz
Power factor	>0.9
Running current	0.19A
Total wattage	41W

Photometric Data

Calculation file	T6IDD4520EZ.ltd
LOR	99.98%
Luminaire lumens	3335lm
Efficacy LL/CW	81.34

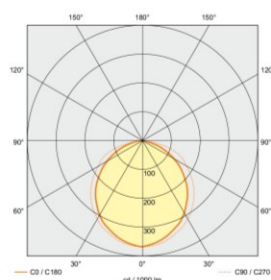

Weight



5.0 kg