



Bright Future LED Product data sheet

T6LIR4400EZ

Recessed Range/Linear Recessed

Product Codes

LED	T6LIR4400EZ	1149x105x90mm	30W	4400lm
------------	-------------	---------------	-----	--------

Emergency


EM	T6LIR4400EZ/EM	1149x105x90mm	30W	4400lm
-----------	----------------	---------------	-----	--------

DALI

DALI	T6LIR4400XD	1149x105x90mm	30W	4400lm
-------------	-------------	---------------	-----	--------



Dimensions

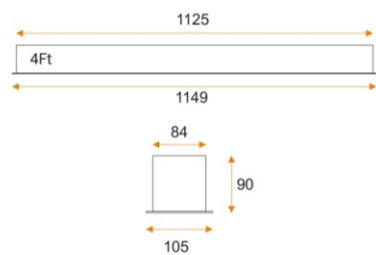

Material and Finish

- Extruded aluminium housing
- U.V. stabilised to prevent discolouring
- PMMA diffuser
- Powder coated finished

LED Characteristics

CCT	4000°K
Ra (CRI)	>80
Life expectancy	50,000 hrs L80 B10
Board lumens	4400lm
Rated power	30W

Electrical Input

Rated input voltage	~230-240V AC
Rated input frequency	50-60Hz
Power factor	>0.9
Running current	0.17A
Total wattage	32W

Weight



Photometric Data

Calculation file	T6LIR4400EZ.ltd
LOR	99.98%
Luminaire lumens	3150lm
Efficacy LL/CW	95.45

