



Bright Future LED Product data sheet


T6LIRT4400EZ

Recessed Range/Linear Recessed Trimless

Product Codes				
LED	T6LIRT4400EZ	1125x105x90mm	30W	4400lm
Emergency				
EM	T6LIRT4400EZ/EM	1125x105x90mm	30W	4400lm
DALI				
	T6LIRT4400XD	1125x105x90mm	30W	4400lm



Dimensions

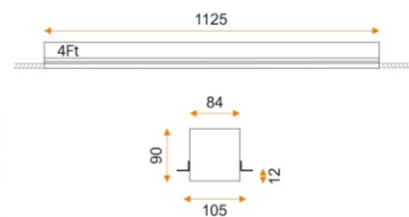

Material and Finish	
• Extruded aluminium housing	• U.V. stabilised to prevent discolouring
• PMMA diffuser	• Powder coated finished

Weight



LED Characteristics	
CCT	4000°K
Ra (CRI)	>80
Life expectancy	50,000 hrs L80 B10
Board lumens	4400lm
Rated power	30W
Electrical Input	
Rated input voltage	~230-240V AC
Rated input frequency	50-60Hz
Power factor	>0.9
Running current	0.17A
Total wattage	33W

Photometric Data	
Calculation file	T6LIRT4400EZ.Idt
LOR	99.98%
Luminaire lumens	3150lm
Efficacy LL/CW	95.45

