



Bright Future LED Product data sheet

T9EBO3150EZ

Exterior Range/Epcot Bulkhead (Open)

Product Codes

LED	T9EBO3150EZ	22W	ø465mm	3150lm
-----	-------------	-----	--------	--------

Emergency

EM	T9EBO3150EZ/EM	25W	ø465mm	3150lm
----	----------------	-----	--------	--------

DALI

DALI	T9EBO3150XD	22W	ø465mm	3150lm
------	-------------	-----	--------	--------



Material and Finish

- Injection moulded polycarbonate base
- U.V. stabilised to prevent discolouring
- Die cast aluminium housing
- Removable gear tray for easy maintenance
- Suitable for wall or ceiling mounting

LED Characteristics

CCT	4000°K
Ra (CRI)	>80
Life expectancy @65°C	50,000 hrs L80 B10
Board lumens	3150lm
Rated power	22W


Electrical Input

Rated input voltage	~230-240V AC
Rated input frequency	50-60Hz
Power factor	>0.9
Running current	0.11A
Total wattage	25W

Photometric Data

Calculation file	T9EBO3150EZ.ltd
LOR	99.98%
Luminaire lumens	2102.9lm
Efficacy LL/CW	84

Dimensions

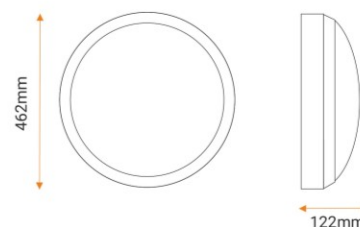

Weight

