



# Bright Future LED Product data sheet

# T5LASQ22000

Architectural Range/Linear Square Type A

Product Codes			
<b>LED</b>	T5LASQ22000EZ	152W/120W	Down 22000lm - Up 17600lm

Emergency			
<b>EM</b>	T5LASQ22000EZ/EM	152W/120W	Down 22000lm - Up 17600lm

DALI			
	T5LASQ22000XD	152W/120W	Down 22000lm - Up 17600lm




Material and Finish	
• Opal diffuser	• Aluminium housing
• U.V. stabilised to prevent discolouring	• Adjustable wire suspension

LED Characteristics	
CCT	4000°K
Ra (CRI)	>80
Life expectancy	50,000 hrs L80 B10
Board lumens	Down 22000lm - Up 17600lm
Rated power	152W + 120W

Electrical Input	
Rated input voltage	~230-240V AC
Rated input frequency	50-60Hz
Power factor	>0.9
Running current	1.44A
Total wattage	292W

## Dimensions

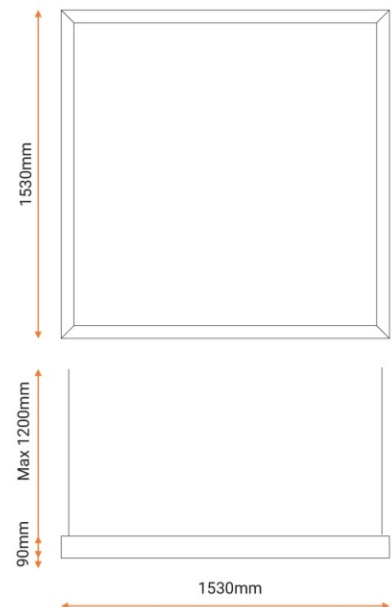

## Weight



Photometric Data	
Calculation file	*T2LIA5500EZ.Idt
LOR	99.98%
Luminaire lumens	6615lm
Efficacy LL/CW	117.5

\* This file contains a single 1530mm LIA.  
Please arrange in square formation within the lighting design program.