



# Bright Future LED Product data sheet

# T5LBSQ22000

Architectural Range/Linear Square Type B

### Product Codes

<b>LED</b>	T5LBSQ22000EZ	152W	Down 22000lm
------------	---------------	------	--------------

### Emergency

<b>EM</b>	T5LBSQ22000EZ/EM	152W	Down 22000lm
-----------	------------------	------	--------------

### DALI

<b>DALI</b>	T5LBSQ22000XD	152W	Down 22000lm
-------------	---------------	------	--------------



### Material and Finish

- Opal diffuser
- Aluminium housing
- U.V. stabilised to prevent discolouring
- Adjustable wire suspension


### LED Characteristics

CCT	4000°K
Ra (CRI)	>80
Life expectancy	50,000 hrs L80 B10
Board lumens	Down 22000lm
Rated power	152W

### Electrical Input

Rated input voltage	~230-240V AC
Rated input frequency	50-60Hz
Power factor	>0.9
Running current	0.75A
Total wattage	160W

### Dimensions

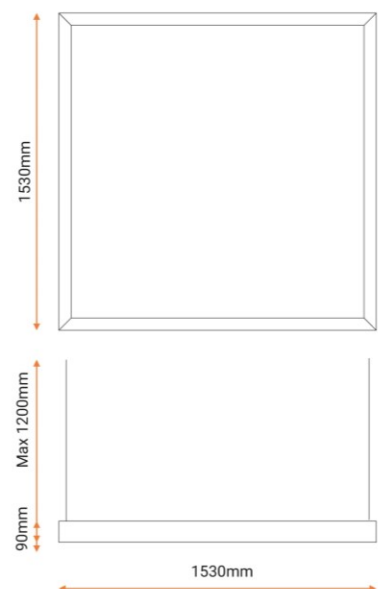

### Weight



### Photometric Data

Calculation file	*T2LIB5500EZ.ltd
LOR	99.98%
Luminaire lumens	3980lm
Efficacy LL/CW	99.5

\* This file contains a single 1530mm LIB.  
Please arrange in square formation within the lighting design program.